




The Strato Rock's "little brother". Don't let the description fool you, it's crafted using the same Glass Fiber Reinforced Concrete (GFRC) construction and has the same great climbing features and durability as its big brother. Cre8ed to be linked to the Strato, these two siblings can produce a new climber that can span 18 feet in length. Or, connect them together with one of our Rope Links (8000001, 8000200 thru 8000205) to attach to the Ledge Rock Climber w/Rope Tabs.



**Ledge Rock Climber
1000020**

L: 6'-2" x W: 5'-6" x H: 6'-0"
3,500 LBS



**Ledge Rock Climber
w/Rope Tabs
1000021**

L: 6'-2" x W: 5'-6" x H: 6'-0"
3,500 LBS




3D Fossil Reliefs



**Available as deck
attachment**

~ Dimensions and weights are approximate ~
~ Heights shown from top of surfacing ~
User Group Age: 5-12



Installation Instructions

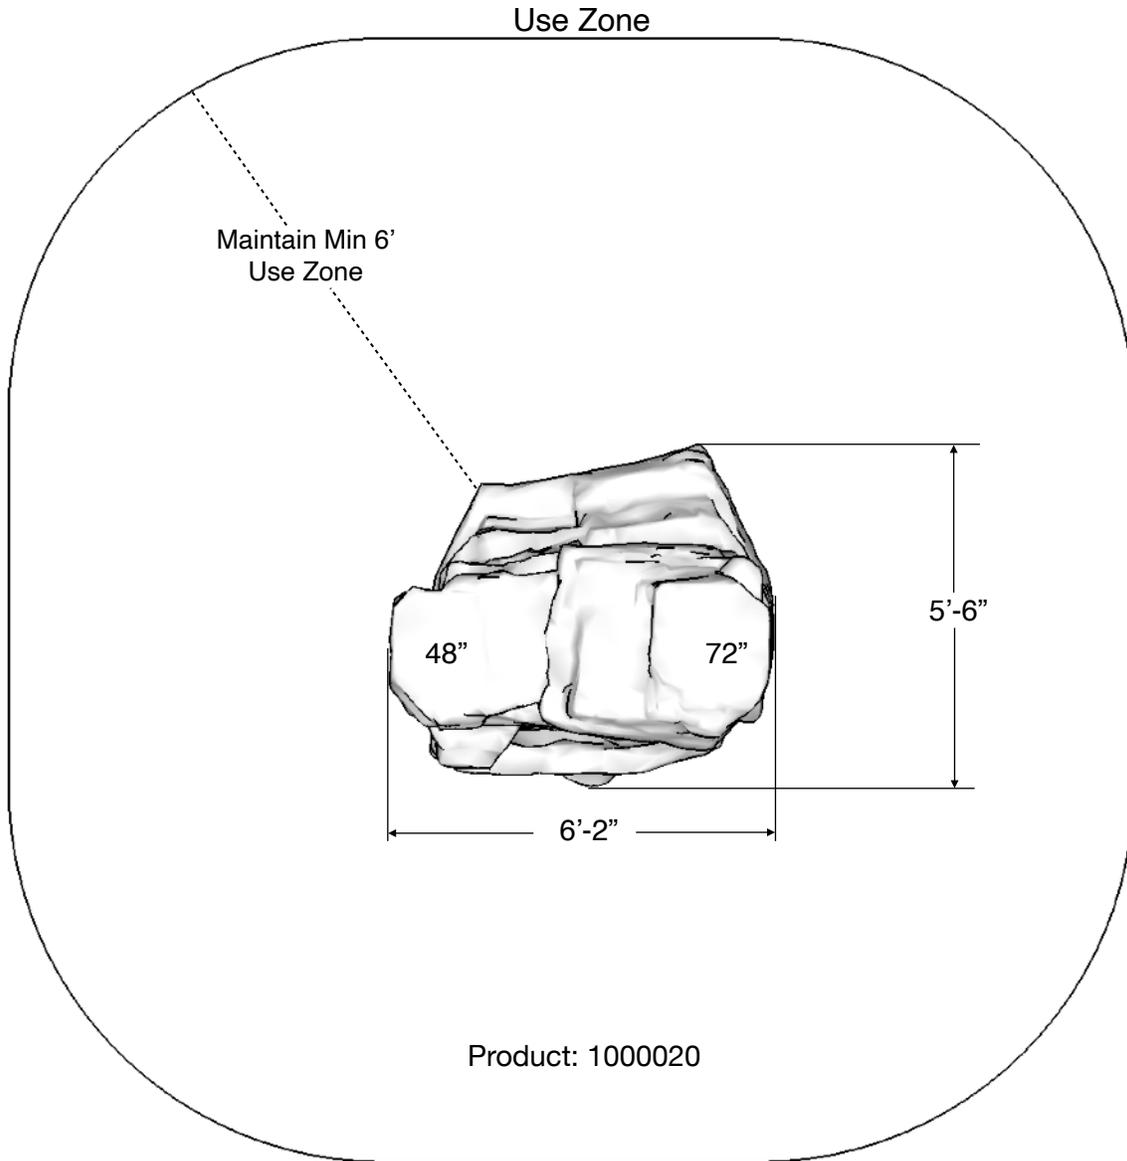

Included Items:

Item	Description	Quantity
Ledge Rock Climber	Play Equipment	1
Anchor Bolt 5/8" x 6"	Mounting Hardware	4

Installation Instructions

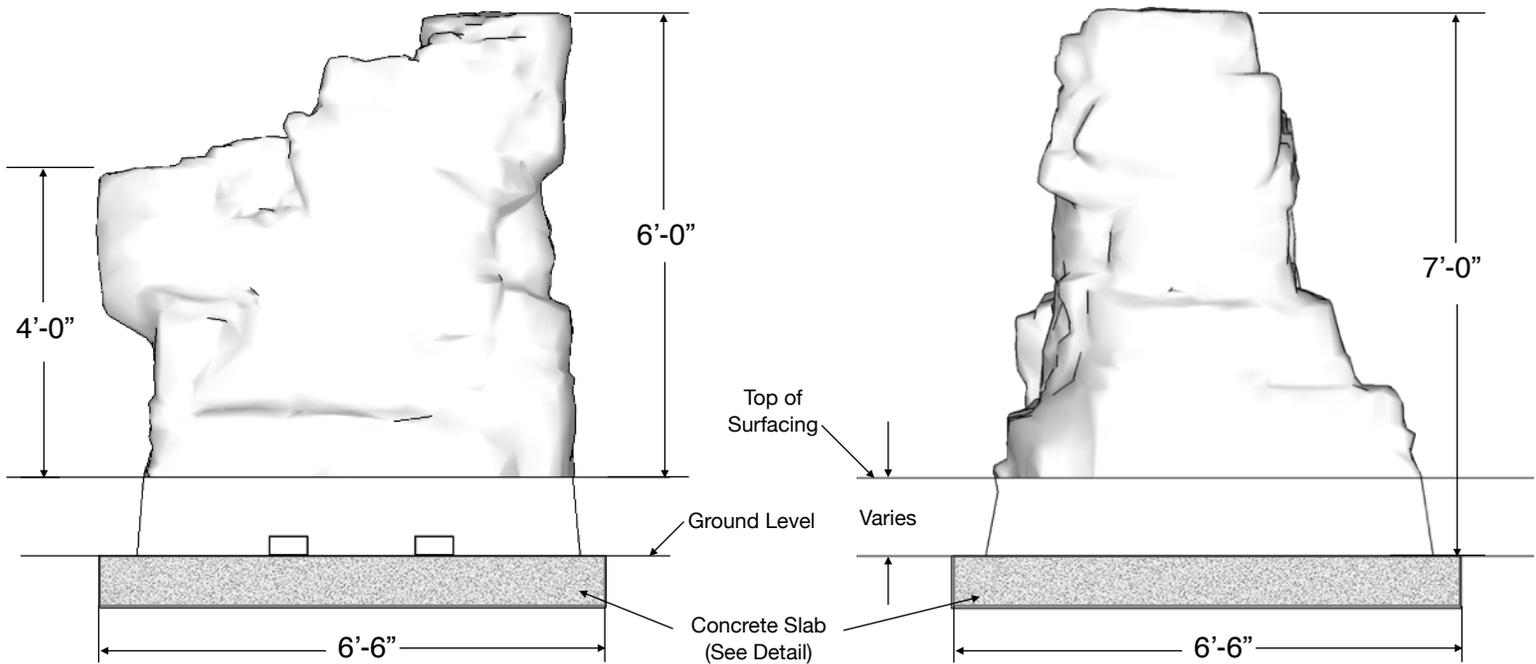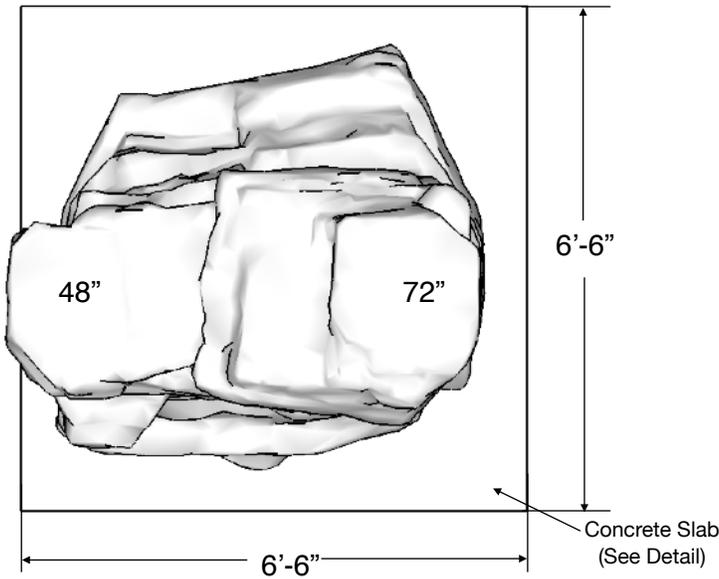

~ All dimensions are approximate ~

User Group Age: 5-12

Revised 12/1/2021

Installation Instructions


NOTE: Read installation instructions thoroughly before starting installation process.

Step 1: Lay out the area and prepare the site for install. Concrete must be installed over a solid, level base. Check local soil condition and codes. See product installation instructions for minimum use zone requirements to ensure proper spacing and adequate surfacing area.

Step 2: Pour a concrete base for the Ledge Rock Climber. Refer to the typical slab section on this page. The concrete should be flush with the ground level. Allow time for the concrete to completely cure before continuing.

Step 3: Using an appropriate lull-type forklift or boom, place Ledge Rock Climber into final installation location. See the hardware recommendation page for information on anchoring equipment down to your slab. Refer to the surfacing manufacturer for installation of an approved impact attenuating play surface around the Ledge Rock Climber with a minimum of 6 feet in every direction.

Note: See separate installation instructions for Rope Link when installing Ledge Rock Climber product number 1000021.

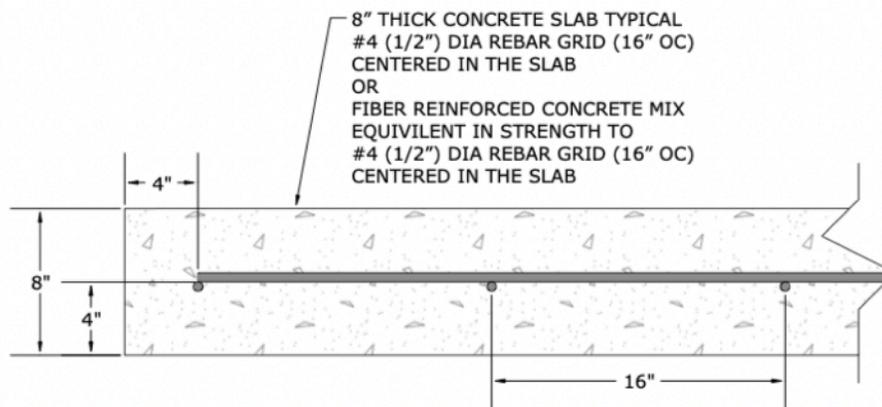

TYPICAL 8" CONCRETE SLAB DETAIL (NOT TO SCALE)
CHECK LOCAL SOIL CONDITIONS.

NOTES PRIOR TO CONSTRUCTION:

- Use appropriate equipment to lift and move the play equipment.
- Check local codes and requirements prior to digging or installing any equipment.

! WARNING

INSTALLATION OVER A HARD SURFACE SUCH AS CONCRETE, ASPHALT, OR PACKED EARTH MAY RESULT IN SERIOUS INJURY OR DEATH FROM FALLS.

THE REMOVAL OF HELMETS, HOODS, DRAWSTRINGS, AND ACCESSORIES AROUND THE NECK IS RECOMMENDED TO PREVENT ENTANGLEMENT AND STRANGULATION.

PLAY EQUIPMENT AND/OR SURFACING MAY BE HOT.

~ All dimensions are approximate ~

User Group Age: 5-12

Revised 12/1/2021

5121 Winnetka Ave N • Suite 108

New Hope, MN 55428

612.670.8195

info@cre8play.com

cre8play.com

Installation Instructions


Step 4: Locate your anchor bolts, supplied by Cre8Play. Using the proper standard drill bit size noted in the installation table, drill the concrete to the appropriate hole depth (C) through the mounting holes.

Step 5: Insert the anchor bolt into the hole and tighten until the bolt is fully seated. Do NOT over tighten the anchor bolts.


Installation Table

Anchor Bolt Size	ANSI Standard Drill Bit Diameter	Anchor Head (Socket Size) Diameter Ⓐ	Minimum Embedment Ⓑ	Hole Depth Ⓒ
5/8" x 6"	1/2"	13/16"	5 1/2"	6 1/2"


Anchor Bolt (Large Diameter Tapcon) Installation:




Mounting Detail
(Not to Scale)

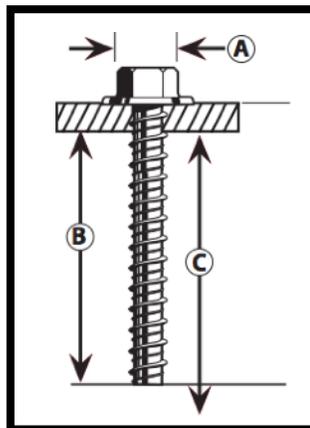

Step 1: Drill

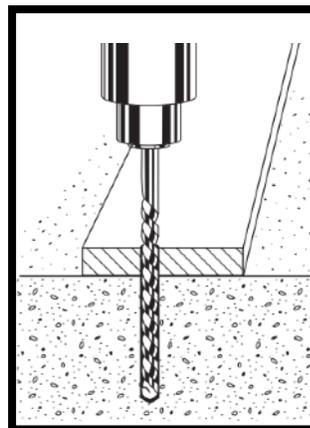


Step 2: Anchor

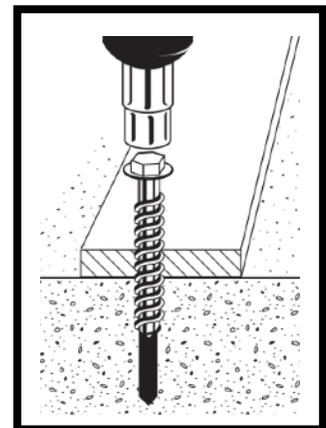

NOTE: Always wear eye protection appropriate to the task at hand.

Installation Instructions

Configured rock climber to rock climber: When the rocks are configured together, the adjacent top surfaces should be level with each other, +/- 1". The space between the two rocks should not be greater than 1-1/2".

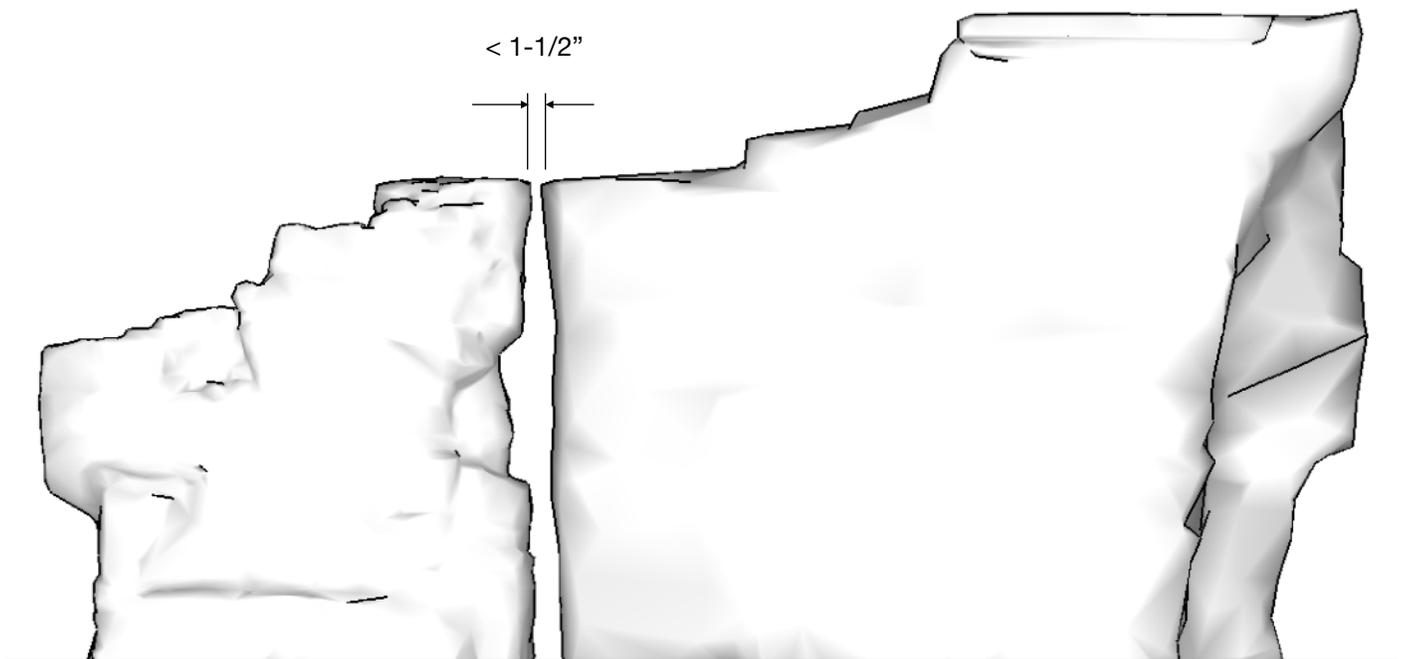



Ledge Rock

Strato Rock

Rock climber to rock climber

Installation Instructions

Configured rock climber to deck: When using a rock climber as a deck attachment, the rock climber surface adjacent to the deck surface should be flush with the deck surface or less (up to 1"). The adjacent rock surface should NOT be higher than the deck surface. The center of the rock climbing surface is offset from center of the concrete slab. See below images to place the concrete slab in the correct position to the center of the deck opening.

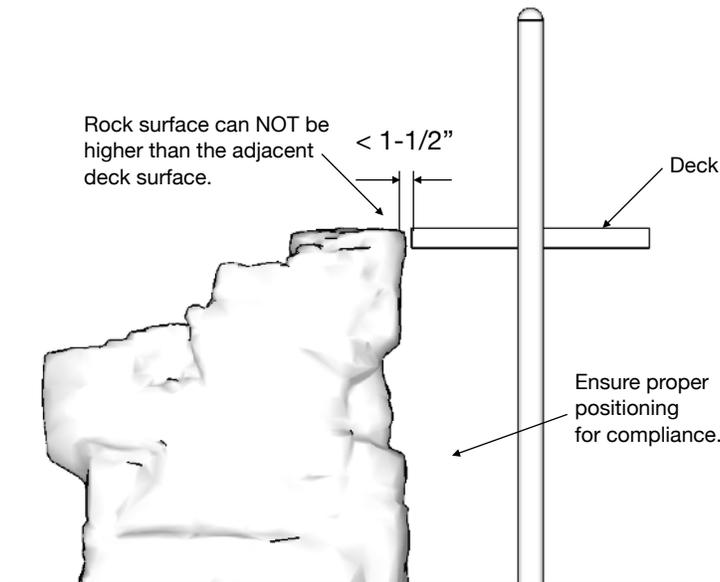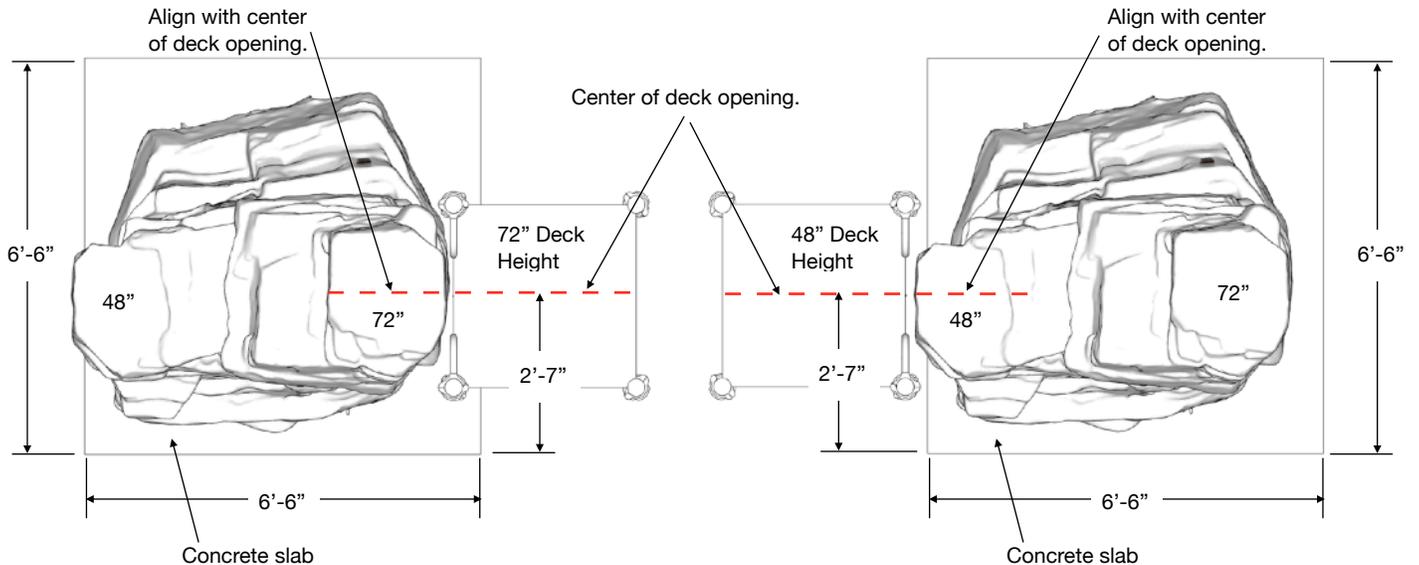

Ledge Rock Climber to deck

~ All dimensions are approximate ~

User Group Age: 5-12

Revised 12/1/2021