



A naturally appearing log with a sculpted bark finish makes for a very unique Fallen Tree Balance Beam. Fabricated and themed from Glass Fiber Reinforced Concrete (GFRC) to create a great look and feel. Challenges kids' balance and stability and provides fun.




Fallen Tree Balance Beam
1000073

L: 6'-0" x W: 4'-0" x H: 0'-6"
400 LBS

~ Dimensions and weights are approximate ~
~ Heights shown from top of surfacing ~
User Group Age: 2-12

5121 Winnetka Ave N • Suite 108
New Hope, MN 55428
612.670.8195
info@cre8play.com
cre8play.com

Installation Instructions

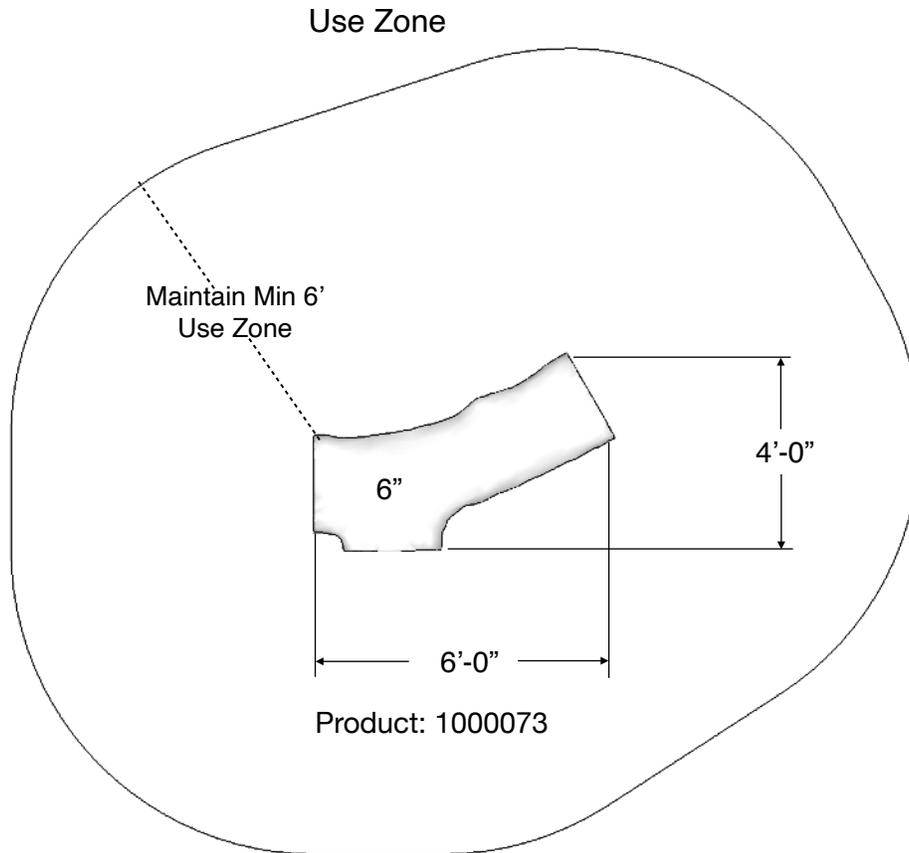


Note: Product 1000073

Included Items:


Item	Description	Quantity
Balance Beam	Play Equipment	1
Anchor Bolt 1/2" x 3"	Mounting Hardware	4

Installation Instructions

Surface Mount

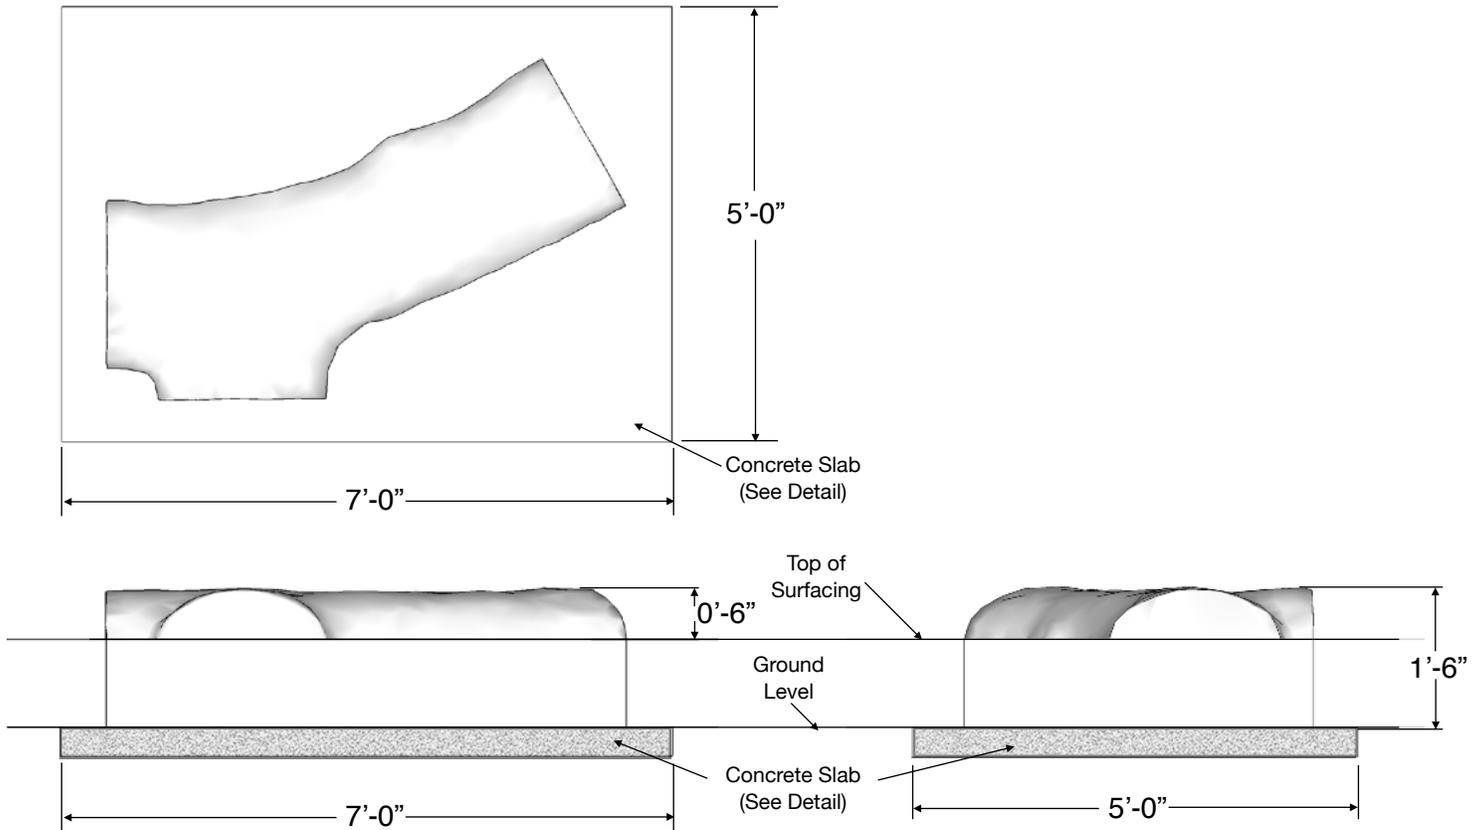

Product: 1000073

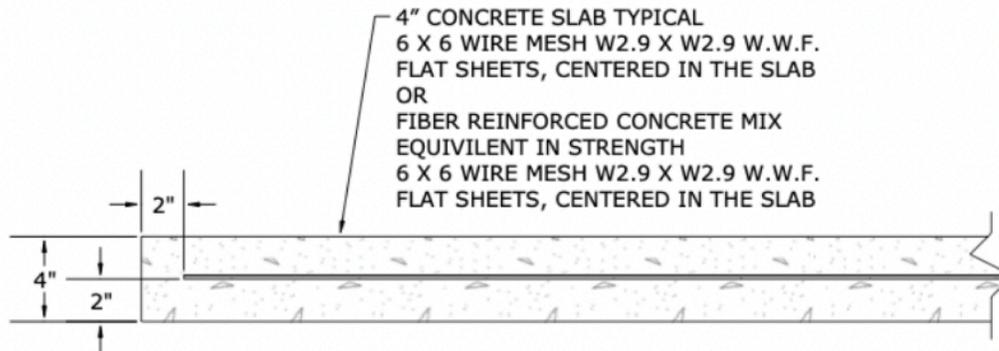

TYPICAL 4" CONCRETE SLAB DETAIL (NOT TO SCALE)
 CHECK LOCAL SOIL CONDITIONS.

~ All dimensions are approximate ~

User Group Age: 2-12

Last Revised 12/1/2021

Installation Instructions

Surface Mount

NOTE: Read installation instructions thoroughly before starting installation process.


Step 1: Lay out the area and prepare the site for install. Concrete must be installed over a solid, level base. Check local soil condition and codes. See installation instructions for minimum use zone requirements to ensure proper spacing and adequate surfacing area.

Step 2: Pour a concrete base for the balance beam. Refer to the typical slab section in these installation instructions. The concrete should be flush with the sub-grade surface. Allow time for the concrete to completely cure before continuing.

Step 3: Using an appropriate lull-type forklift or boom, place balance beam into final installation location. See the hardware recommendation page for information on anchoring equipment down to your slab. Refer to the surfacing manufacturer for installation of an approved impact attenuating play surface around the balance beam with a minimum of 6 feet in every direction.

NOTES PRIOR TO CONSTRUCTION:

- Use appropriate equipment to lift and move the play equipment.
- Check local codes and requirements prior to digging or installing any equipment.

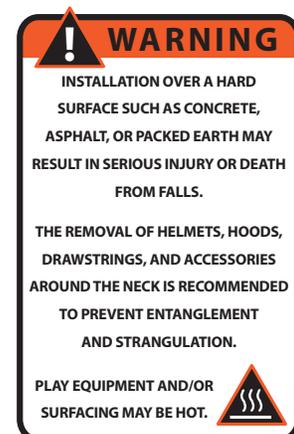

~ All dimensions are approximate ~

User Group Age: 2-12

Last Revised 12/1/2021

Installation Instructions

Surface Mount


Step 4: Locate your anchor bolts, supplied by Cre8Play. Using the proper standard drill bit size noted in the installation table, drill the concrete to the appropriate hole depth (C).

Step 5: Insert the anchor bolt into the hole and tighten until the bolt is fully seated. Do NOT over tighten the anchor bolts.


Installation Table

Anchor Bolt Size	ANSI Standard Drill Bit Diameter	Anchor Head (Socket Size) Diameter Ⓐ	Minimum Embedment Ⓑ	Hole Depth Ⓒ
1/2" x 3"	7/16"	3/4"	2 1/2"	3 1/2"


Anchor Bolt (Large Diameter Tapcon) Installation:

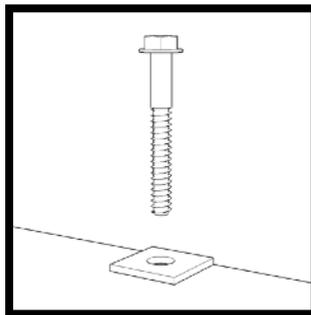


Mounting Detail
(Not to Scale)

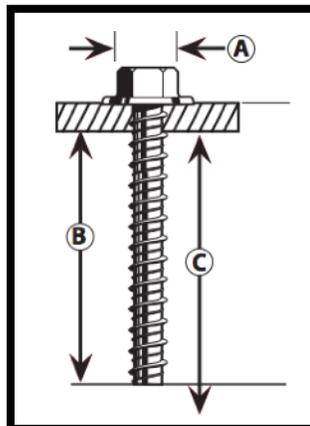

Step 1: Drill

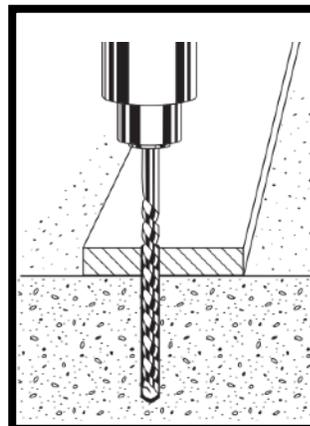

Step 2: Anchor

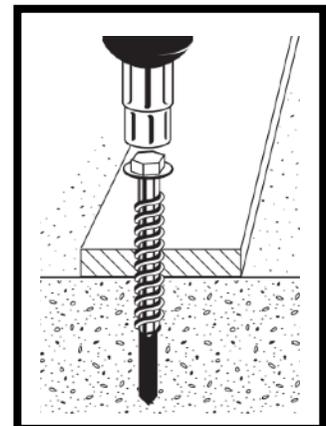

NOTE: Always wear eye protection appropriate to the task at hand.