





A realistic rock climber with varying degrees of climbing difficulties. Constructed of durable Glass Fiber Reinforced Concrete (GFRC). The unique design allows for 360 degrees of climbing, integrated handholds, realistic texture, fossil reliefs and a one of a kind ADA access for users of all abilities.

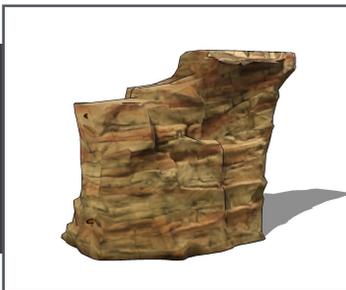


**Strato Rock Climber**  
**1000001**


L: 10'-3" x W: 7'4" x H: 8'-0"  
5,200 LBS

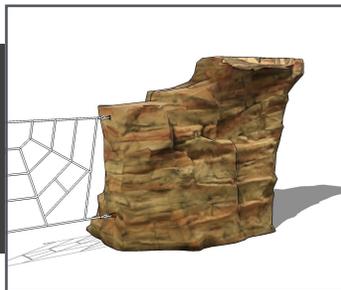

**Strato Rock w/ Rope Tabs**  
**1000010**

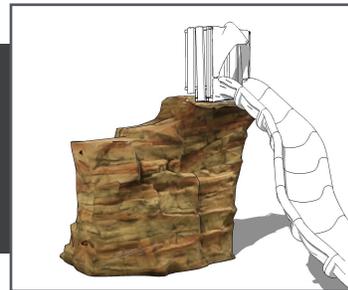


**Strato Rock w/ Slide Attachment**  
**1000011**

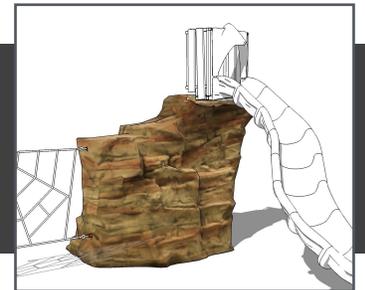

**Strato w/ Slide Attachment and Tabs**  
**1000012**

~ Dimensions and weights are approximate ~  
~ Heights shown from top of surfacing ~  
**User Group Age: 5-12**




## Installation Instructions

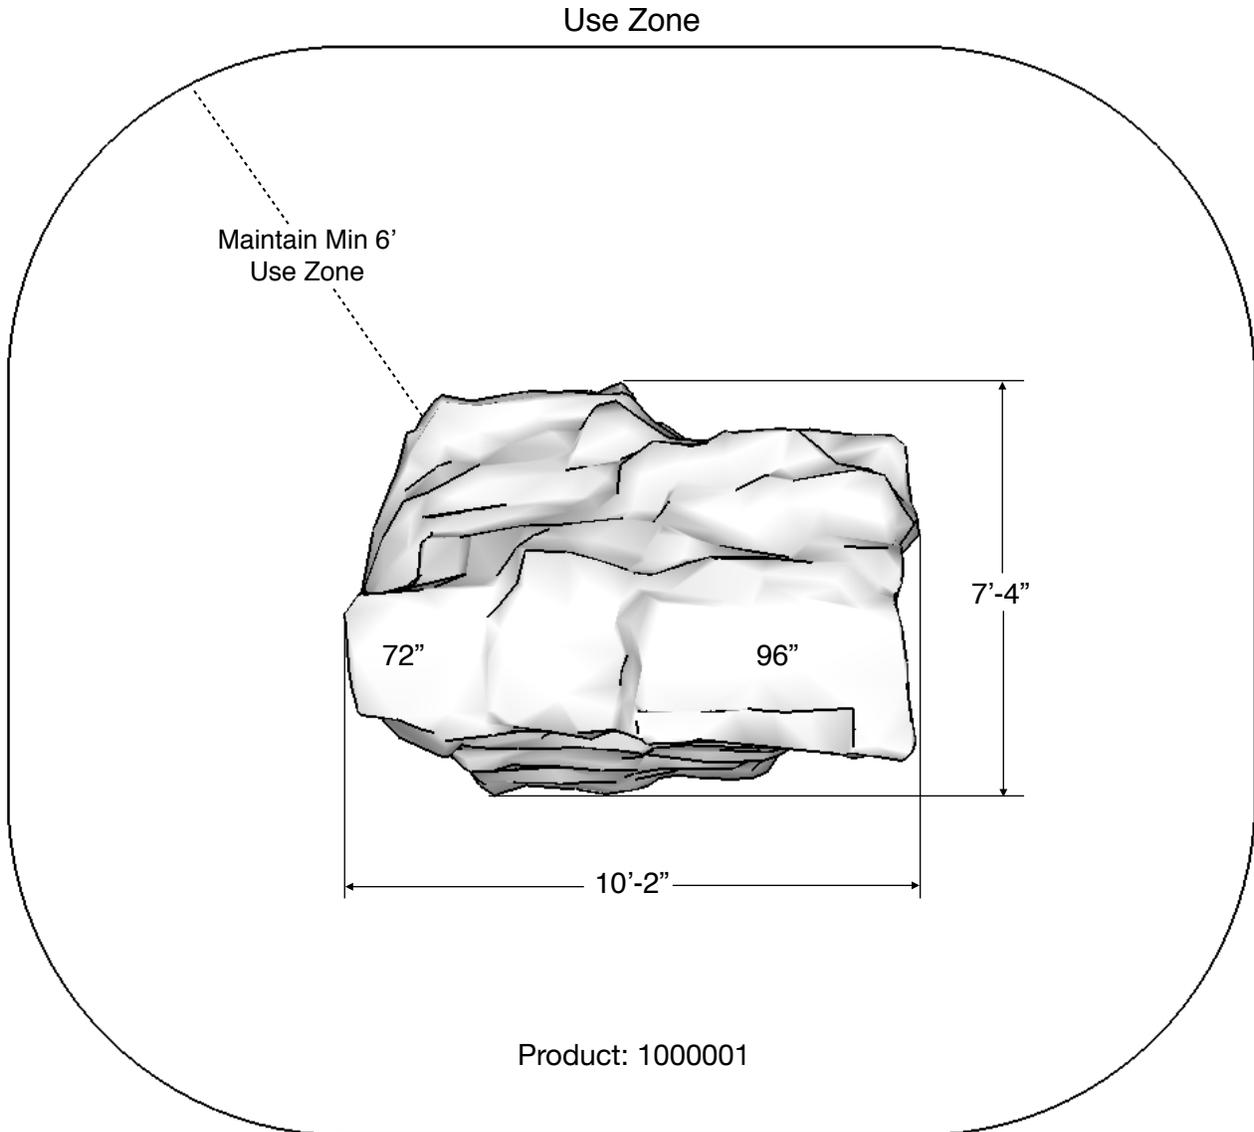

### Included Items:

Item	Description	Quantity
Strato Rock Climber	Play Equipment	1
Anchor Bolt 5/8" x 6"	Mounting Hardware	4

Installation Instructions

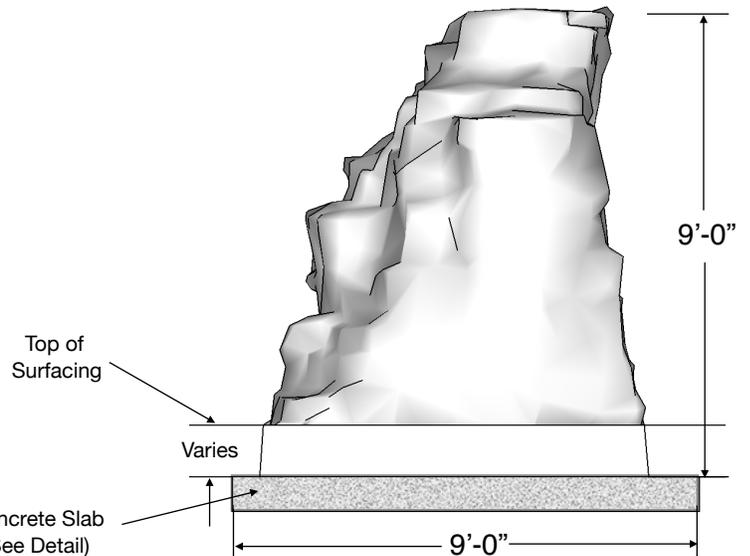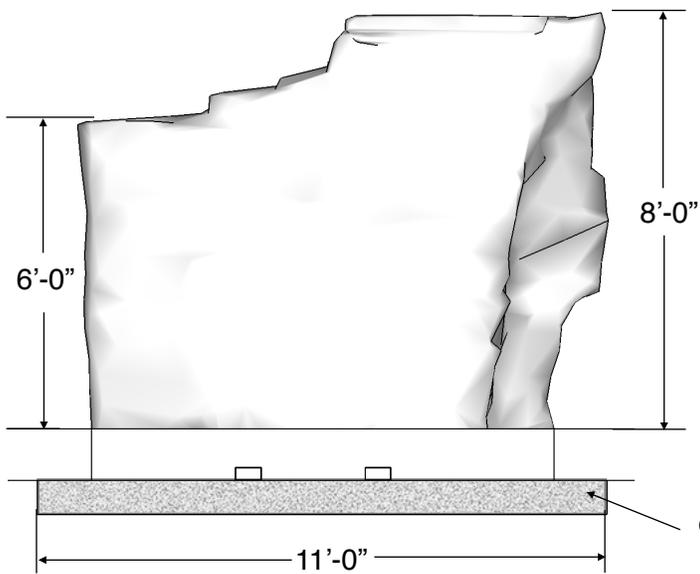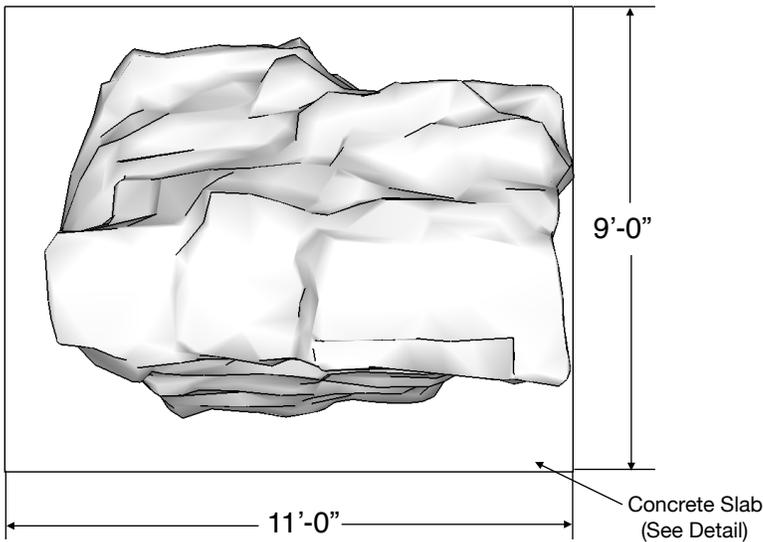

~ All dimensions are approximate ~

**User Group Age: 5-12**

Last Revised 4/25/16

## Installation Instructions


**NOTE: Read installation instructions thoroughly before starting installation process.**

**Step 1:** Lay out the area and prepare the site for install. Concrete must be installed over a solid, level base. Check local soil condition and local codes. See product installation instructions for minimum use zone requirements to ensure proper spacing and adequate surfacing area.

**Step 2:** Pour a concrete base for the Strato Rock Climber. Refer to the typical slab section on the typical footing page. The concrete should be flush with the sub-grade surface. Allow time for the concrete to completely cure before continuing.

**Step 3:** Using an appropriate lull-type forklift or boom, place Strato Rock Climber into final installation location. See the hardware recommendation page for information on anchoring equipment down to your slab. Refer to the surfacing manufacturer for installation of an approved impact attenuating play surface around the Strato Rock Climber with a minimum of 6 feet in every direction.


**Note:** See separate installation instructions for Rope Link and Strato Slide when installing Strato Rock Climber product numbers 1000010, 1000011 or 1000012.

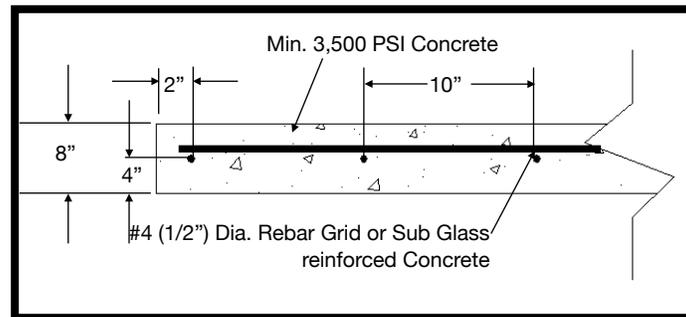

**Typical 8" Concrete Slab Section**  
Check Local Soil Conditions  
(Not to Scale)

### NOTES PRIOR TO CONSTRUCTION:

- Use appropriate equipment to lift and move the play equipment.
- Check local codes and requirements prior to digging or installing any equipment.

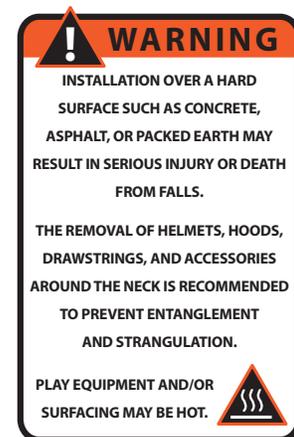

~ All dimensions are approximate ~

**User Group Age: 5-12**  
Last Revised 4/25/16

## Installation Instructions


**Step 4:** Locate your anchor bolts, supplied by Cre8Play. Using the proper standard drill bit size noted in the installation table, drill the concrete to the appropriate hole depth (C).

**Step 5:** Insert the anchor bolt into the hole and tighten until the bolt is fully seated. Do NOT over tighten the anchor bolts.


**Installation Table**

Anchor Bolt Size	ANSI Standard Drill Bit Diameter	Anchor Head (Socket Size) Diameter (A)	Minimum Embedment (B)	Hole Depth (C)
5/8" x 6"	1/2"	13/16"	5 1/2"	6 1/2"


**Anchor Bolt (Large Diameter Tapcon) Installation:**

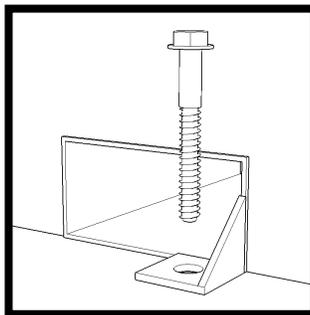


**Mounting Detail**  
(Not to Scale)

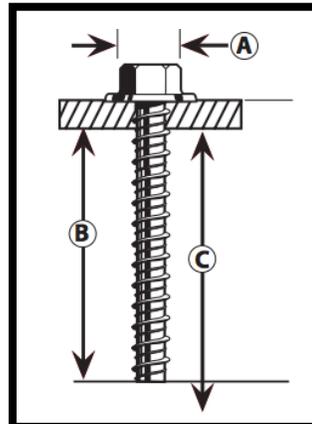

**Step 1: Drill**

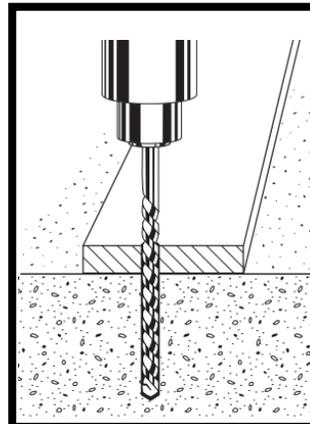

**Step 2: Anchor**


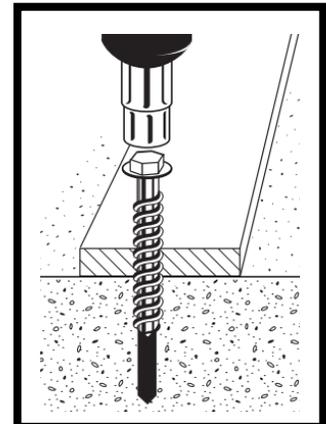


**NOTE: Always wear eye protection appropriate to the task at hand.**

## Installation Instructions

**Configured rock climber to rock climber:** When the rocks are configured together, the adjacent top surfaces should be level with each other, +/- 1".

**Configured rock climber to deck:** When using a rock climber as a deck attachment, the rock climber surface adjacent to the deck surface should be flush with the deck surface or less (up to 1"). The adjacent rock surface should NOT be higher than the deck surface.

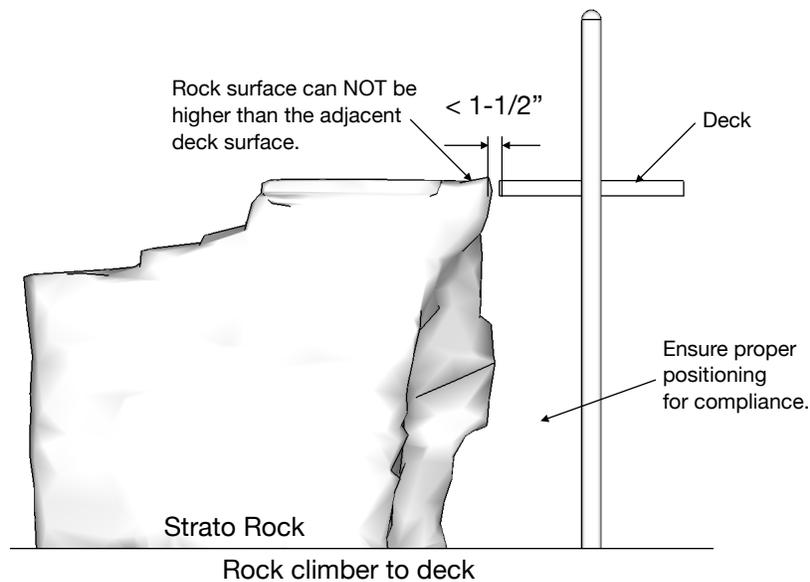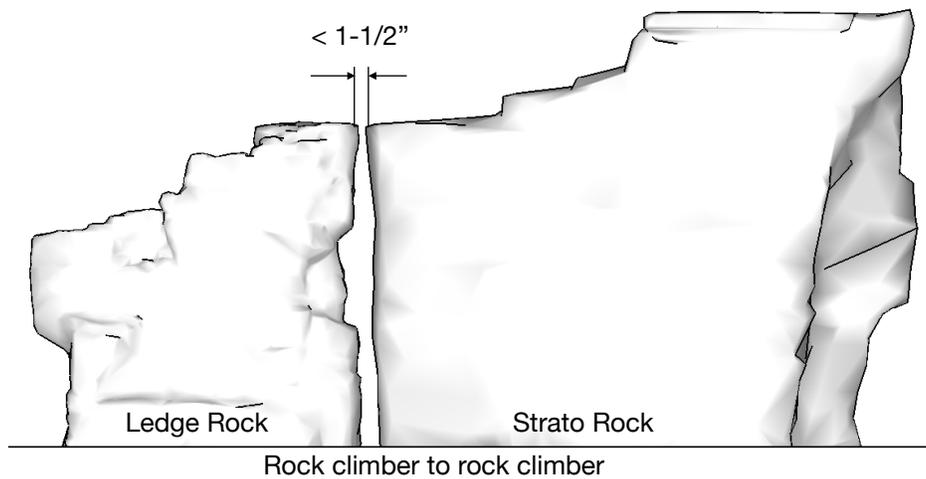

~ All dimensions are approximate ~

**User Group Age: 5-12**

Last Revised 4/25/16